



PM-PD4ULSR-W

4MP Vari Dome P-Iris IP Cameraa4.3X Motorized Zoom

Panasonic Cameras are developed to deliver high-performance security solutions, safeguarding homes, retail spaces, and offices with advanced technology and robust surveillance. Equipped with intelligent video analytics, these cameras can automatically detect and respond to specific security events such as line crossing, abandoned or missing objects, and more-providing real-time alerts that enhance situational awareness and response. The integrated Region of Interest (ROI) functionality allows users to prioritize critical areas within the camera's field of view.



NDA
COMPLIANT

H.265+ H.264
H.265 JPEG



SECURE
SSL ENCRYPTION

IP67



Key Features

- 4MP Vari dome P-Iris network cameraa
- 4.3x Optical Zoom
- 120dB Wide Dynamic Range
- Color Night Vision: Color: 0.0016 lux@F1.6, AGC ON
- IR range: 30~50m
- IP67 protection from dust and water
- IK10 protection for vandal resistance
- Advanced encryption and access control
- NDA



Specifications

CAMERA	
Type	4MP Vari Dome P-Iris Network Cameraa
Image Sensor	1/1.8" CMOS
Max Resolution	4MP (2560×1440)
Electronic Shutter	1/3s~1/100000s
Min. Illumination	Color: 0.0016 lux@F1.6, AGC ON
IR Distance / Light Range	30~50m
LENS	
Focal Length	2.8~12mm@F1.5
Focus	Motorized Varifocal
Iris Type	P-Iris
Optical Zoom	4.3x (Motorized zoom)
Angular Field of View	H.FoV: 102°~47° V.FoV: 56°~26° D.FoV: 118°~55°
Day&Night	ICR
IMAGE	
Video Compression	Mainstream: H.265+/H.265/H.264+/H.264 Sub/third stream: H.265+/H.265/H.264+/H.264/MJPEG
Supported Resolution	4MP (2560×1440) 3MP (2304×1296) 1080P (1920×1080) 720P (1280×720) D1(704×480) VGA (640×480) 480×240 CIF(352×288)
Number of Supported Stream	3
Mainstream	60Hz: 4MP/3MP/1080P/720P (1~30fps) 50Hz: 4MP/3MP/1080P/720P (1~25fps)
Sub Stream	60Hz: 720P/D1/VGA/480×240/CIF (1~30fps) 50hz: 720P/D1/VGA/480×240/CIF (1~25fps)
Third Stream	60Hz: D1/CIF/480×240 (1~30fps) 50Hz: D1/CIF/480×240 (1~25fps)
Bit Rate	64Kbps~8Mbps
Bit Rate Type	VBR/CBR
Image Settings	ROI Saturation Brightness Hue Contrast Wide Dynamic Defog Sharpness Image Mirror Image Flip NR etc.adjustable through client software or web browser
Audio Compression	G711A/U
Region Of Interest	Each ROI to be configured separately
OPERATIONAL	
Wide Dynamic Range	120dB
Back Light Compensation (BLC)	Yes
High Light Compensation (HLC)	Yes
Defog	-
Digital Noise Reduction (DNR)	Yes
S/N ratio	≥50dB
Angle Adjustment	Pan: 0°~345° Tilt: 0°~77° Rotation: 0°~345°
INTERFACES	
Network	RJ 45 10M/100M self-adaptive Ethernet port
Video	CVBS output (BNCx1)
Audio	1CH audio input 1CH audio output 1CH built-in MIC
Storage	Built-in micro SD card slot, up to 256GB
Alarm	1CH alarm input 1CH alarm output
DORI DISTANCE	
Lens	2.8~12mm(W) 2.8~12mm(T)
Detect	57m(187ft) 132m(433ft)

Specifications

Observe	23m(75ft) 53m(174ft)
Recognize	11m(36ft) 26m(85ft)
Identify	6m(20ft) 13m(43ft)
INTELLIGENT ANALYTICS	
Statistics	Yes, with NVR or SD Card
Audio Exception Detection	Yes
Face Detection	Yes
Face Recognition and Matching	Yes, with NVR
Video Metadata(Human/Vehicle Attributes / Two Wheelers)	Yes, with NVR
OTHER ANALYTICS	
Motion Detection	-
Smart Alarm	Motion detection SMD SD card full, SD card error IP address conflict Cable disconnection Video exception (scene change, video blur and abnormal color detection)
Smart Event	Line Crossing Region Intrusion Entrance/Exiting Detection (Human/Motor Vehicle/Non-Motor Vehicle Classification) Abandoned/Missing Object Detection Loitering Detection Illegal Parking Detection Target Counting By Line Heat Map
FUNCTIONS	
Remote Monitoring	Web browser NVR Panasonic VMS 2.X Mobile APP
Web Browser	Chrome 89.0+ Edge 89.0+ Firefox 87.0+ Safari 14.0+
Online Connection	Support simultaneous monitoring for up to 10 users Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTMP, RTCP, PPPoE DDNS, SMTP, FTP, SNMP, HTTP, HTTP POST, 802.1 UPnP, HTTPS, P2P, QoS
Interface Protocol	ONVIF Profile S/G/M
Other Function	Watermark Video Mask Heartbeat Image Distortion Correction Corridor Pattern ANR Cloud Upgrade
Security	Video encryption Firmware encryption HTTPS encryption Configuration encryption Illegal login lock IP address filtering 802.1x authentication Basic and digest authentication for HTTP/RTSP NDAA
GENERAL	
Power Supply	DC12V/PoE
PoE	Yes, IEEE802.3af/at
Power Consumption	<12.5W
Weather Protection	IP67 protection from dust and water IK10 protection for vandal resistance
Operating Environment	-30°C~60°C (-22°F~140°F) Humidity: less than 95% (non-condensing)
Storage Environment	-30°C~65°C (-22°F~149°F) Humidity: less than 95% (non-condensing)
Dimensions (mm)	Ø141×100.2
Weight (net)	Approx.0.93KG
Installation	Ceiling mounting Wall mounting
Certificate	EMC: EN 55032:2015+A11:2020 EN 55035:2017+A11:2020 Safety: EN IEC 62368-1:2020+A11:2020 RoHS: 2011/65/EU

Appearance

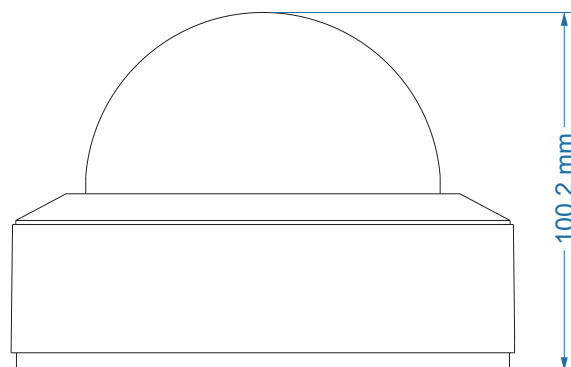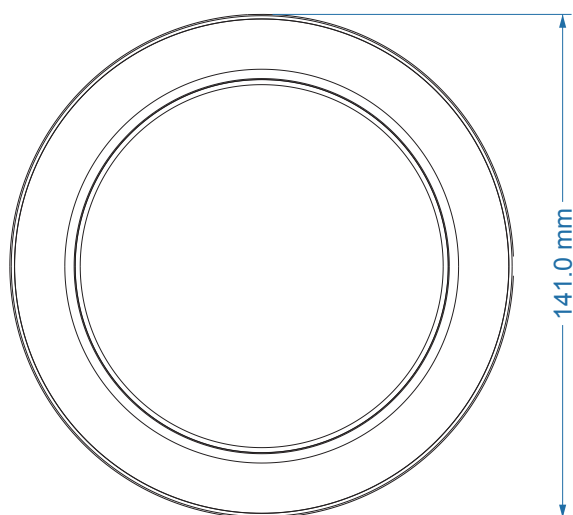

Optional Accessories

Mount Bracket



PM-YH0207-W
Junction box alu-
minium, Base part



PM-YZJ0701B
In-Ceiling mount



PM-YH0207-W+
PM-YZJ0407-W
Wall Mount Bracket



PM-YH0207-W+
PM-YZJ0407-W+
PM-YZJ0501-W
Pole Mount Bracket



PM-YH0207-W+
PM-YZJ0407-W+
PM-YZJ0601-W
Corner Mount
Bracket



PM-YH0207-W+
PM-YZJ0811-W
Ceiling Mount
Bracket

Disclaimer:

Panasonic accepts no responsibility or liability for the performance of the network, nor for any third-party products used in conjunction with this system. Product dimensions and masses are approximate. Specifications are subject to change without notice.